

Specifications


- Sizes to 3/4" NPT
- Carbon Steel Body, Zinc Plated
- Working Pressure to 5000 PSI (350 bar)
- Metal to Metal Seat

Options

- Field replaceable springs available with 30 PSI or 60 PSI settings




Dimensional Information

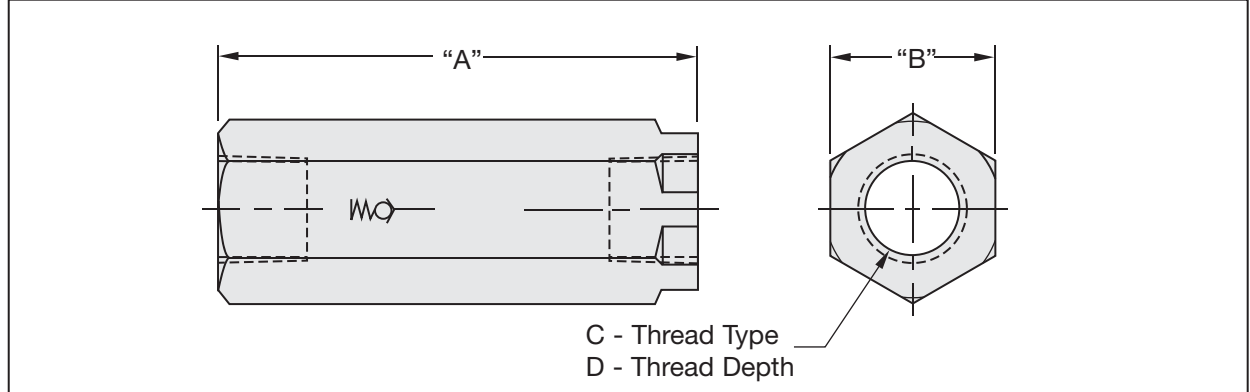

Part Number	A - Length		B - Width		C - Port Diameter	D - Thread Depth		Operating Pressure		Weight	
	mm	in	mm	in		NPT	mm	in	Bar	PSI	kg
RVM8-7N	63.0	2.48	22	0.87	1/4" NPT	12.5	0.49	350	5000	0.2	0.44
RVM10-7N	69.0	2.71	27	1.06	3/8" NPT	12.5	0.49	350	5000	0.4	0.88
RVM12-7N	80.5	3.17	32	1.26	1/2" NPT	15.5	0.61	350	5000	0.7	1.54
RVM16-7N	99.5	3.92	36	1.42	3/4" NPT	17.0	0.67	350	5000	1.2	2.64

Ordering Information

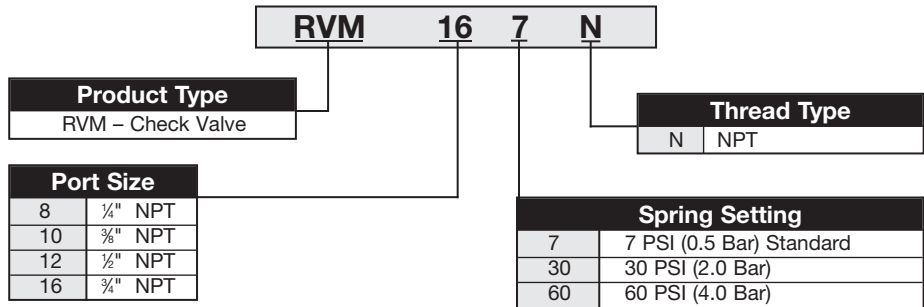

REPLACEMENT SPRINGS	
Part #	Description
RVM-8-30	30 PSI Spring
RVM-8-60	60 PSI Spring
RVM-10-30	30 PSI Spring
RVM-10-60	60 PSI Spring
RVM-12-30	30 PSI Spring
RVM-12-60	60 PSI Spring
RVM-16-30	30 PSI Spring
RVM-16-60	60 PSI Spring